

WHEN YOU BUY MILTON® YOU BUY THE BEST

MILTON®



MILTON®

MANUFACTURING CO., INC.
1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622

CATALOG NO. 2-64

MILTON[®]

...Accuracy Beyond Compare

THE MODERN GAGES DESIGNED SO THAT THEY NEVER DELAYED REPAIRS . . . If through abuse or contamination, your FACTORY SET CARTRIDGE CAN BE INSERTED "ON THE SPOT"

MILTON[®] BAYONET AIRLINE GAGE

The **FIRST** SINGLE Replacement Cartridge Airline Gage
An entirely New Concept . . . VALVE and GAGE are Combined in
ONE REPLACEMENT CARTRIDGE!

with **MILTON**
Accuracy Beyond COMPARE

- COMPACT
- LIGHTWEIGHT
- FULL RANGE
10 LBS. TO 120 LBS.
- ACCURATE
- RUGGED
- ECONOMICAL
- LEVER ACTION

BIG SAVINGS!
LOW INITIAL COST!
LOWEST REPAIR COST!

EASY TO READ!


LARGE Black Numbers on "JUMBO" White Nylon Indicator Bar . . . all four sides calibrated from 10 lbs. to 120 lbs., in 2 lb. increments.

OUR NO. DESCRIPTION


- 500-4** Dual Head Chuck Assembly (Free Flowing for Tire Gages Only)
- *500-6** { Dual } Head Chuck Washer (Standard Size)
- *500-7** Single Head Chuck Washer (Standard Size)
- *500-36** Swivel Washer for Hose Whips (Not required for Nos. 528-532)
- 500-44** Single Head Chuck Assembly (Free Flowing for Tire Gages Only)
- 500-45** Straight Head Chuck Assembly (Free Flowing For Tire Gages Only)
- 520** BAYONET GAGE, with Straight Head Chuck
- 521** BAYONET GAGE, with Single Head Chuck
- 522** BAYONET GAGE, with Dual Head (Truck) Chuck
- 525** REPLACEMENT CARTRIDGE (Combines Valve and Gage in One Unit)
- **526** Hose Whip Assembly Complete (Single Head Chuck, 12" Hose, 1/4" NPT)
- **527** Hose Whip Assembly Complete (Dual Head Chuck, 12" Hose, 1/4" NPT)
- **528** Hose Whip Assembly Complete (Straight Head Chuck, 12" Hose, 1/4" NPT)
- 530** Hose Whip Assembly Complete (Single Head Chuck 12" Hose, 3/8"-24 thrd.)
- 531** Hose Whip Assembly Complete (Dual Head Chuck, 12" Hose, 3/8"-24 thrd.)
- 532** Hose Whip Assembly Complete (Straight Head Chuck, 12" Hose, 3/8"-24 thrd.)

*NOT ILLUSTRATED


**FOR REPLACEMENT ON BAYONET GAGE

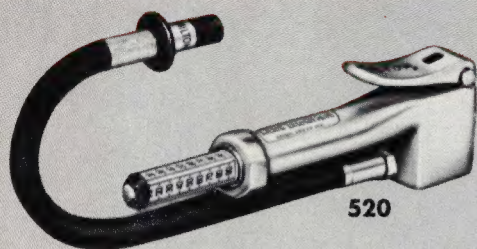


520

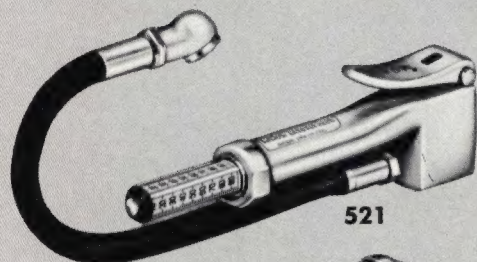


521

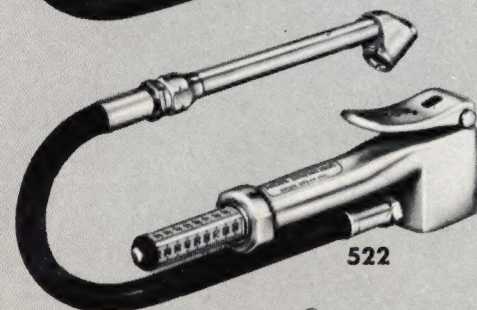

522

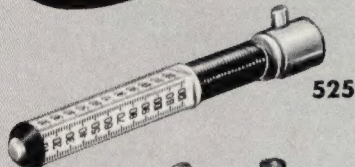

525

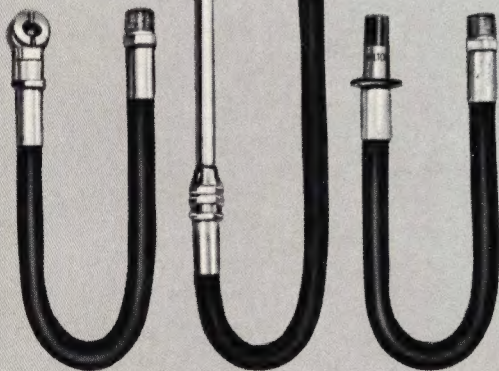

526
530

527
531

528
532





500-44



500-45



500-4

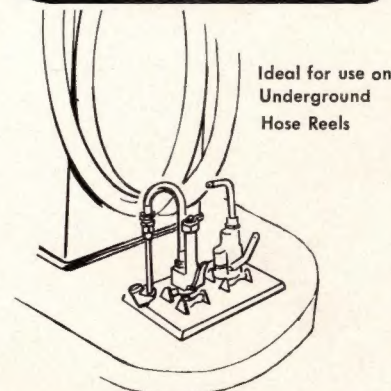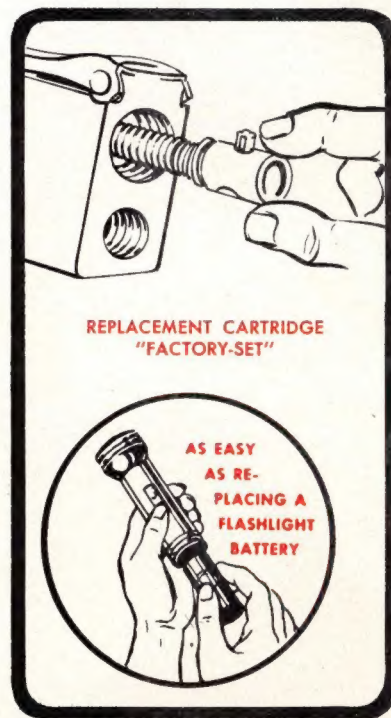

MILTON MANUFACTURING CO., Inc.

1900 WEST HUBBARD STREET
CHICAGO, ILLINOIS 60622

and COMPARE

NEED LEAVE THE AIR-LINE FOR ORDINARY SERVICE . . . NO gage should become inaccurate or inoperative . . . A NEW TO RESTORE YOUR GAGE TO 100% EFFICIENCY.

MILTON[®] INFLATOR GAGE


★ **RUGGED CONSTRUCTION**

HEAVY DUTY TO WITHSTAND EVERYDAY USE AND
ABUSE AND PROVIDE LONG SERVICE LIFE . . .


**EASIER TO READ
ACCURACY**

Magnifying Lens—thin line indicator ring allows full view of scale—2-lb. graduations from 10 lbs. to 120 lbs.

**REPLACEABLE
"GAGE" CARTRIDGE**
New factory set cartridge
inserted "ON THE SPOT"

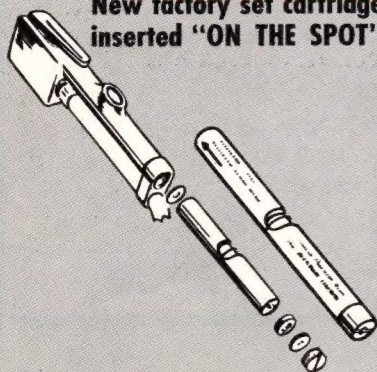


**REPLACEABLE "VALVE"
CARTRIDGE**
Single unit—easily replaced
"ON THE SPOT"




OUR NO.	DESCRIPTION
500-4	Dual Head Chuck Assembly (Open-type for use on automatic tire gages Only)
*500-6	{ Dual } Head Chuck Washer { Straight } (Standard Size)
*500-7	Single Head Chuck Washer (Standard Size)
*500-16	Lens
*500-17	Lens Retainer Ring
*500-36	Swivel Washer
500-44	Single Head Chuck Assembly (Open-type for use on automatic tire gages Only)
500-45	Straight Head Chuck Assembly (Open-type for use on automatic tire gages Only)
504	Gage Complete, Straight Head Chuck
505	Gage Complete, Single Head Chuck (Full Swivel)
506	Gage Complete, Dual Head Chuck (Full Swivel)
507	Replacement Gage Cartridge
508	Hose Whip Assembly Complete (Single Head Chuck, 15" Hose, 3/8"-24 Thrd.)
509	Hose Whip Assembly Complete (Dual Head Chuck, 15" Hose, 3/8"-24 Thrd.)
510	Hose Whip Assembly Complete (Straight Head Chuck, 15" Hose, 3/8"-24 Thrd.)
512	Replacement Valve Cartridge
*517	Adapter (1/4" NPT x 3/8"-24 Thrd.) for use in converting 15" Hose Assemblies to 1/4" NPT.
*NOT ILLUSTRATED	


MILTON[®]

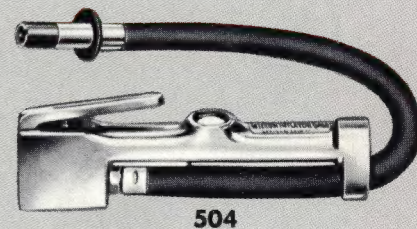

504

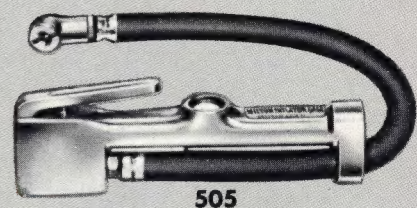

505

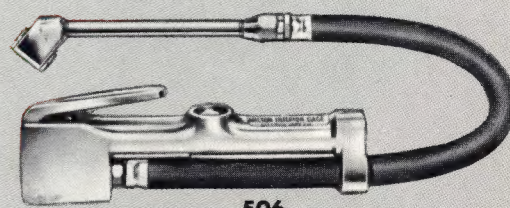


506



507




512



508



509

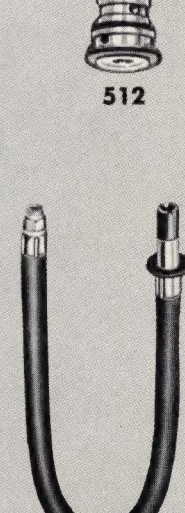

510



500-44



500-45



500-4

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622


MILTON[®]

FIRST

by

MILTON[®] SERVICE GAGE

(10 to 120 lbs.)

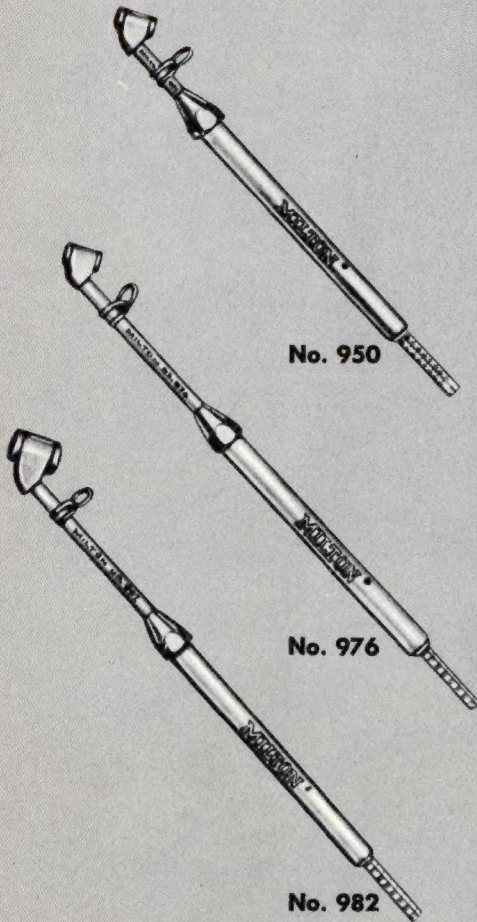


PRECISION ENGINEERED TO GIVE YOU MASTER GAGE ACCURACY IN A LONG LIFE SERVICE GAGE.

YOUR CHOICE . . . Standard Dual-Head Chuck in Short Extension or Regular Extension. Also "JUMBO" Dual-Head Chuck with Regular Extension . . . All Models with Same LONGER and STRONGER Body . . .

EASY TO READ *Nylon* INDICATOR BAR

Calibrated all four sides from 10 to 120 lbs.
in 2 lb. units . . . RED MARKER

OUR NO.	DESCRIPTION
950	Short Extension Service Gage (D. H. Chuck).
976	Regular Extension Service Gage (D. H. Chuck).
982	Regular Extension Service Gage ("JUMBO" D. H. Chuck).

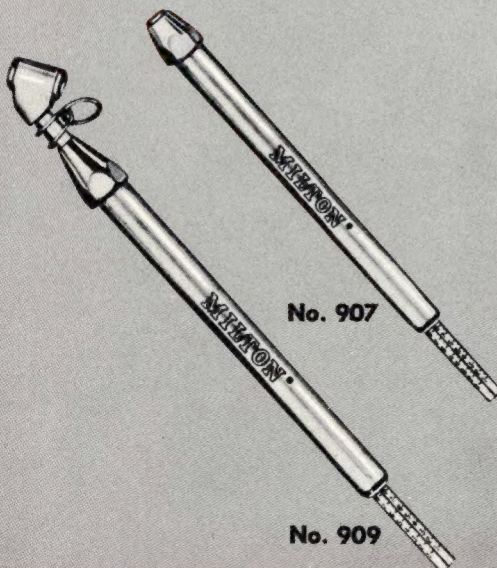

MILTON[®] X-TRA LOW PRESSURE GAGE

SERVICE GAGE STYLE

(1 to 10 lbs.)

DESIGNED TO MEASURE THE EXTREME LOW PRESSURES USED IN

- Air Lifts • Pontoons • Floats
- Industrial and Bag & Barrel Type Tires, Etc.

Available in Single Head or Dual Head Models . . . For use with standard tire valves. Both of these gages are manufactured with the same longer and stronger body which are a feature of all Milton Service Type Gages.

EASY TO READ *Nylon* INDICATOR BAR

Calibrated all four sides from 1 to 10 lbs. in 1/2 lb. units . . . RED MARKER

OUR NO.	DESCRIPTION
907	X-tra Low Pressure Gage, Single Head Chuck.
909	X-tra Low Pressure Gage, Dual Head Chuck.

NOTE: Available also in "JUMBO" Dual Head Chuck & Special Chuck Styles (Not Illustrated).

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622

Comparison

MILTON®

MILTON® PENCIL TYPE GAGES

- First
- Accurate
- Dependable

**A MODEL FOR EVERY USE!
A USE FOR EVERY MODEL!**

MILTON® PENCIL TYPE GAGES PROVIDE THE FINEST IN ACCURATE, LONG LIFE, TROUBLE FREE PERFORMANCE... DESIGNED AND CONSTRUCTED TO PROVIDE THE QUALITY THAT MEANS SATISFACTION IN USE AND A LEVEL OF EXCELLENCE UNSURPASSED BY ANY OTHER MANUFACTURER.


**All Models
EASY TO READ**

WITH

**Accuracy
Beyond
COMPARE**

Nylon INDICATOR BAR with RED MARKER

OUR NO.	DESCRIPTION
917	Low Pressure Gage, calibrated all four sides from 2 to 20 lbs. in 1 lb. units.
921	Passenger Car Tire Gage, calibrated all four sides from 5 to 45 lbs. in 1 lb. units.
923	Straight Chuck Passenger Car Tire Gage (ideal for gaging tires with decorative wheel covers) calibrated all four sides from 5 to 45 lbs. in 1 lb. units.
925	Truck Tire Gage, calibrated all four sides from 20 to 120 lbs. in 5 lb. units.
927	Dual Chuck Truck Tire Gage, calibrated all four sides from 20 to 120 lbs. in 5 lb. units.
928	Tractor Tire Gage (for use on air/water filled tires) calibrated all four sides from 5 to 45 lbs. in 1 lb. units.

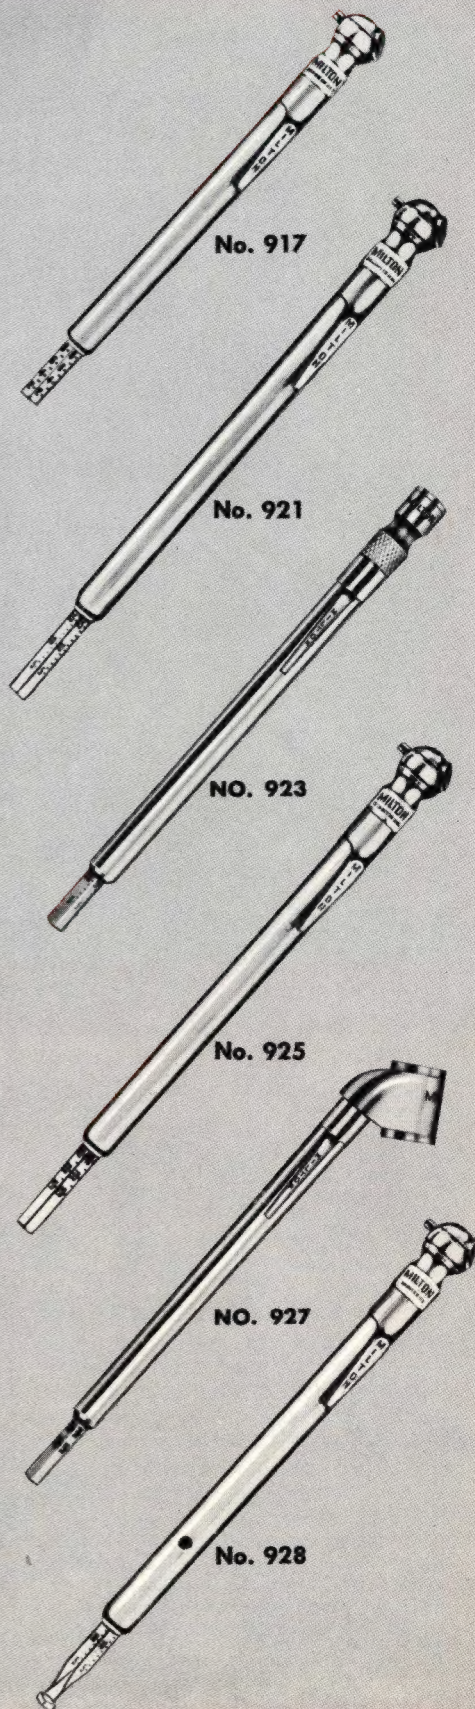

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622

MILTON[®]

(6" BELL)

No. 805



No. 807




No. 810



No. 817



No. 819



No. 838



MILTON[®] DRIVEWAY SIGNAL

The Signal... to Sales!

A MUST FOR

SERVICE STATIONS • MOTELS • DRIVE-IN
BANKS, LAUNDRIES, RESTAURANTS, ETC.



**DEPENDABLE
PERFORMANCE** ★

Alerts you **Every Time** with Single Loud Clear Tone that Signals **Sales at Your Door.**

**COMPACT
DESIGN** ★

Modern, easy to mount... completely self contained unit, styled to fit the decor of any Station... makes installation easy—just plug cord into any 110 volt electric outlet.

**LONGER
SERVICE** ★

Each **Milton[®] Driveway Signal** is manufactured from the finest materials, fabricated to close tolerances... **Expertly Assembled and Tested** to give you a signal that will perform longer under prolonged "Tuff" use.

OUR NO.

805

807

810

817

819

838

DESCRIPTION

Driveway Signal (6" Bell)

End Plug (for 3/8" I.D. Signal Hose)

Hose Splicer (for 3/8" I.D. Signal Hose)

Hose "Y" (for 3/8" I.D. Signal Hose)

Hose Anchor (for 3/8" I.D. Signal Hose)

Deluxe Driveway Signal Hose (3/8" I.D.)


(50 ft. Length)

MANY USES

SERVICE STATIONS, HOTELS, ESTATES, ROADSIDE STANDS, "BLIND ALLEY" EXITS, ETC.


"MAN THE PUMPS"

You'll never have that "sinking feeling" that comes from seeing a potential customer pulling away because you weren't aware that he was on the drive.

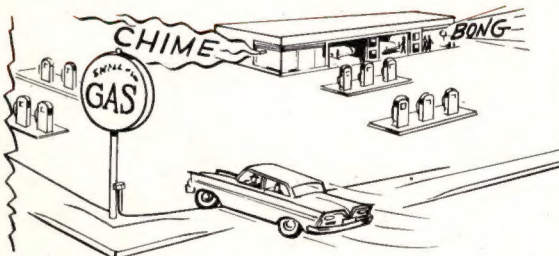

"SOMEONE IS COMING"

You know that someone is on your drive and headed your way. Business or Home... you're alerted to the presence of others before they've arrived at your door.

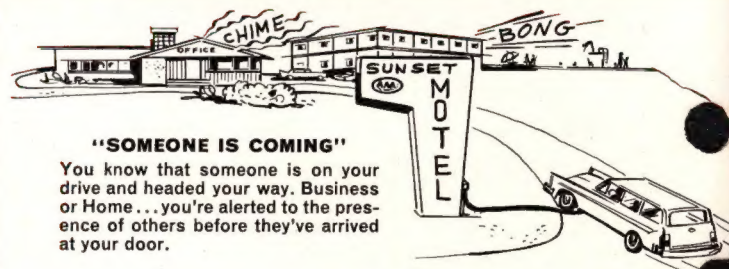


"MIND THE STORE"

NOW... you can "be in two places at one time" secure in the knowledge that there'll be no lost sales because you weren't aware that there was a customer at the stand.



"PREVENT ACCIDENTS"

This Safety Warning Bell installation alerts pedestrian traffic that a vehicle is about to exit from blind approach.

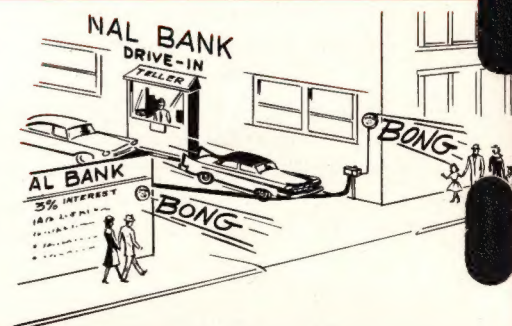

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622

MILTON® REMOTE CONTROL SIGNAL

MILTON® REMOTE CONTROL AIR SWITCH

RUGGED, WEATHERPROOF CONSTRUCTION
For "Trouble-Free" INSIDE or OUTSIDE USE!

Plus "Proven in Use" integral design incorporated into Deluxe Terminal Box Construction to assure Maximum Sensitivity and Long Dependable Performance.

BARRIER TERMINAL STRIP for easy connections.
CONDUIT OPENINGS for versatility in installation.
(See other side of Page For Many Uses!)

OUR NO.	DESCRIPTION
825	REMOTE CONTROL AIR SWITCH (110 Volt and/or LOW VOLTAGE).

MILTON® REMOTE CONTROLLED SIGNAL BELL

The Signal THAT ALERTS YOU EVERY TIME
to Sales... WITH A SINGLE LOUD CLEAR TONE!

EASY TO INSTALL... Conduit type box construction for wall or conduit mounting... with "Proven in Use" BURN OUT PROOF COIL to assure Long Service.

OUR NO.	DESCRIPTION
827	REMOTE CONTROLLED SIGNAL BELL (110 Volt)


MILTON® REMOTE CONTROLLED CHIME

A Must for SERVICE STATION OFFICE, MOTELS, and "DRIVE-INS" of all Kinds!

CLEAR MELODIOUS TONE that sounds the Signal of Good Taste with the reliability of MILTON Signal Bells... Key Slot openings in back make Hang-up or Screw-on installation a breeze... Conduit opening in bottom of box... Same "Proven in Use" BURN OUT PROOF COIL CONSTRUCTION as in No. 827 Signal Bell.


OUR NO.	DESCRIPTION
830	REMOTE CONTROLLED CHIME (110 Volt)

MILTON®

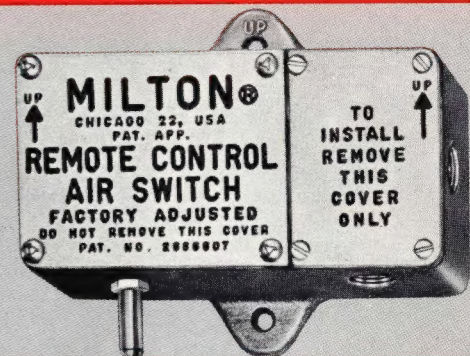

HOW DOES A REMOTE CONTROL SYSTEM OPERATE?

SEE For *Yourself*

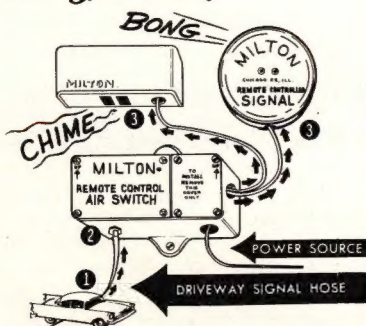

1. Vehicle passes over Driveway Signal Hose and displaces air in Hose.
2. Air from Hose closes electrical contacts in Remote Control Air Switch Box, and
3. Operates Bell and/or Chime.
4. Operates Bell and/or Chime.

NOTE: one MILTON No. 825 Remote Control Air Switch can operate up to 10 Bells and/or Chimes in various locations over a widely scattered area.


WHY USE A REMOTE CONTROL SYSTEM?

☆ ECONOMY ☆ VERSATILITY


Many installations (because of size or Layout) require an exorbitant amount of Driveway Signal Hose in order to utilize a regular direct operating, Self-Contained, Driveway Signal.

Use of a Remote Control System in such installations, enables strategic placement of Hose, reducing the quantity required, and resulting in SAVINGS up to 50% OR MORE of Signal Hose Investment and costly Hose Replacement.

ILLUSTRATED BELOW IS AN EXAMPLE OF ONE SUCH TYPE OF INSTALLATION.

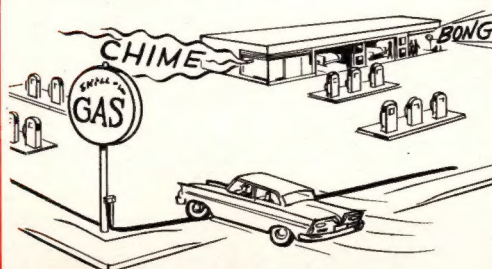

WHAT IS A REMOTE CONTROL AIR SWITCH?



The MILTON No. 825

REMOTE CONTROL AIR SWITCH is an AIR OPERATED, ELECTRICAL CONTROL, in a DELUXE, WEATHERPROOF JUNCTION BOX, which makes a wide variety of Signal Installations possible.

PLUS FEATURES of the MILTON No. 825 REMOTE CONTROL AIR SWITCH

★ Can be used to activate relays to operate all kinds of Electrical Devices, at various distant locations.

Turn on Lights Start Motors Open Garage Doors, etc.

★ Can be used as Control on Low Voltage Systems.

LOW VOLTAGE EQUIPMENT
LOW VOLTAGE POWER SOURCE: Battery or Transformer

MILTON®



...Wherever MILTON® "PUSH-TYPE" COUPLERS

FOR FAST PLUG-IN APPLICATIONS:

- ★ **A HEAVY DUTY** Automatic coupler designed for applications where frequent coupling and uncoupling is necessary.
- ★ **MACHINED FROM SOLID BRASS** with all internal parts corrosion resistant.

OUR NO. DESCRIPTION

- 700-5 Coupler Pin
700-6 Coupler Spring
701 Coupler Repair Kit, consists of—1 Coupler Pin, 1 Coupler Spring & 1 Coupler washer
726 Male Coupler Plug 1/8" N.P.T.
727 Male Coupler Plug 1/4" N.P.T.
728 Female Coupler Plug 1/4" N.P.T.
729 Female Coupler Plug 1/8" N.P.T.
730 Female Coupler Plug (.482" x 26 Tire Valve Stem)
731 Female Coupler Plug (.302" x 32 Tire Valve Cap)
732 Female Coupler Plug 3/8" N.P.T.
733 Male Coupler Plug 3/8" N.P.T.
736 Barbed Coupler Plug 1/4" I.D. Hose
754 "PUSH TYPE" Coupler Body Only (Male, 1/4" N.P.T.)
755 "PUSH TYPE" Coupler Body Only (Female, 1/4" N.P.T.)
756 "PUSH TYPE" Coupler Body Only (Male, 1/8" N.P.T.)
757 "PUSH TYPE" Coupler Body Only (Female, 1/8" N.P.T.)
759 "PUSH TYPE" Coupler Body Only (Hose Barb for 1/4" I.D. Hose)
760 "PUSH TYPE" Coupler Body Only (Male, 3/8" N.P.T.)
761 "PUSH TYPE" Coupler Body Only (Female, 3/8" N.P.T.)
768 Synthetic Washer

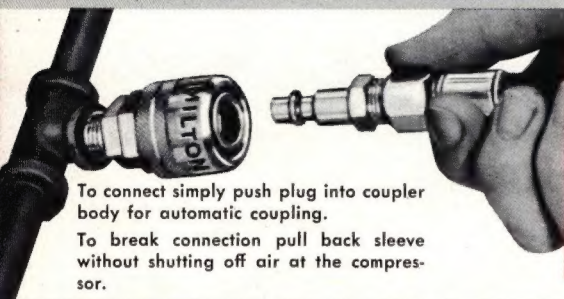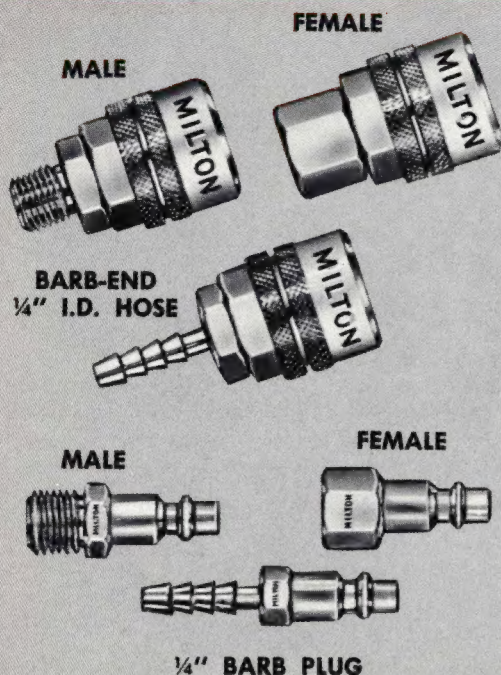

YOUR CHOICE...1/8"...1/4"
Any Combination . . . MALE or FEMALE COUPLER
& Plugs in 1/4" I.D. hose size BARB END style. A M
ALL MODELS GUAR


MILTON® "T" COUPLER

AN INTERCHANGE COUPLER

DESIGNED to MEET the NEED for a Replacement of Various Couplers Used in Specific Areas . . .

Manufactured from the Finest Materials . . . Guaranteed Airtite . . . Plus the High Quality Workmanship that Assures Top Performance of ALL MILTON Products.

DESCRIPTION & INTERCHANGE CHART					
MILTON® No.	DESCRIPTION	INTERCHANGE WITH			
		AMFLO	FORKER	FOWLER	TRU-FLATE
783	Coupler Plug, Male 1/4" N.P.T. (Steel)	CP-1	OP 5	P-5	112 (also) 2C
784	Coupler Plug, Female 1/4" N.P.T. (Steel)	CP-2	OP 6	P-6	113 (also) 3C
785	Coupler Body Only Female 1/4" N.P.T.	C-2	OB 2	B-2	101 B (also) 13
786	Coupler Body Only Male 1/4" N.P.T.	C-1	OB 1	B-1	101 MB (also) 12

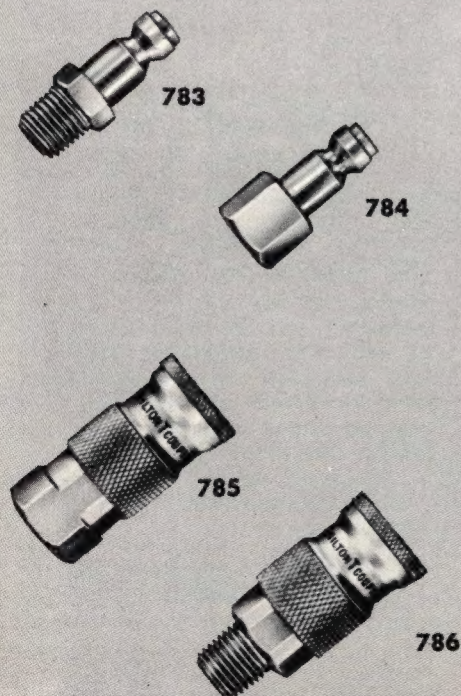

MILTON MANUFACTURING CO., INC.

1900 W. HUBBARD ST. CHICAGO, ILLINOIS 60622

Air is Used

MILTON® "KWIK-CHANGE"® COUPLERS

RUGGED...ECONOMICAL

- ★ **POSITIVE GRIP — NO TWISTING OR TURNING** — Simple as A.B.C. — pull back sleeve to make or break connection without shutting off the air at the compressor.
- ★ **ONE AIR HOSE FOR MANY USES** — Milton's Kwik-Change Coupler will save many \$\$\$ in time and equipment.
- ★ **SAVES VALUABLE TIME** — Disconnects hose from line or equipment with a snap of your fingers.
- ★ **SOLID BRASS CONSTRUCTION** — for rugged durability, with corrosion resistant internal mechanism for longer trouble free service.

Used with all air operated equipment such as: BLOW GUNS, TIRE INFLATORS, PAINT SPRAYERS, AIR HAMMERS, AIR DRILLS, GREASING EQUIPMENT, OIL SPRAYS, RETREADING AND VULCANIZING EQUIPMENT, ETC.

3/8" ... THREAD SIZES...
DIES OR PLUGS ... ALSO available are Couplers
DEL for every use ... A USE for every MODEL.
ANTEED AIRTIGHT

OUR NO. DESCRIPTION

- | | |
|-------|--|
| 700-5 | Coupler Pin |
| 700-6 | Coupler Spring |
| 701 | Coupler Repair Kit, consists of 1 Coupler Pin, 1 Coupler Spring, and 1 Coupler Washer |
| 707 | Coupler Body Only, Female 1/8" N.P.T. |
| 708 | Coupler Body Only, Male 1/8" N.P.T. |
| 711 | KWIK-CHANGE COUPLER ASSEMBLY (No. 715 Body and 727 Plug—1/4" N.P.T. Female and 1/4" N.P.T. Male) Individually Boxed. |
| 715 | Coupler Body Only, Female 1/4" N.P.T. |
| 716 | Coupler Body Only, Male 1/4" N.P.T. |
| 717 | Coupler Body Only, Hose Barb for 1/4" I.D. Hose. |
| 718 | Coupler Body Only, Female 3/8" N.P.T. |
| 719 | Coupler Body Only, Male 3/8" N.P.T. |
| 726 | Male Coupler Plug 1/8" N.P.T. |
| 727 | Male Coupler Plug 1/4" N.P.T. |
| 728 | Female Coupler Plug 1/4" N.P.T. |
| 729 | Female Coupler Plug 1/8" N.P.T. |
| *730 | Female Coupler Plug (.482" x 26 Tire Valve Stem) |
| *731 | Female Coupler Plug (.302" x 32 Tire Valve Cap) |
| 732 | Female Coupler Plug 3/8" N.P.T. |
| 733 | Male Coupler Plug 3/8" N.P.T. |
| 736 | Barbed Coupler Plug (1/4" I.D. Hose) |
| 768 | Synthetic Washer |


*RETREADERS & VULCANIZERS—Use No. 730 or No. 731 plug on curing tube or air bag. Use No. 715 or No. 716 Coupler Body attached to end of air hose for EASIER and FASTER COUPLING of air hose to curing tube or air bag.

Saves valuable time — Positive grip, no twisting or turning — simple as A.B.C. — pull back sleeve to make or break connection.


MILTON®




711



FEMALE




MALE



BARB-END
1/4" I.D. HOSE



MALE



FEMALE



1/4" BARB
PLUG



768



700-5




700-6

To Make Connection—
 Pull Back Sleeve and Push in Plug—Full Volume of Air is Automatically Turned On—Release Sleeve to Lock.




To Break Connection—
 Pull Back Sleeve and Plug "POPS OUT"—Air is Automatically Shut Off.

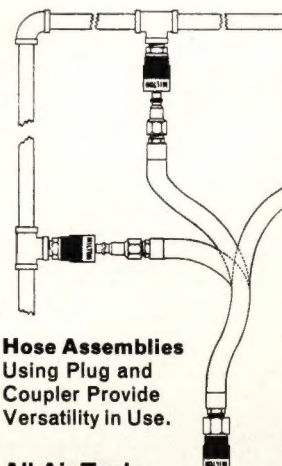

Hose Assemblies
 Using Plug and Coupler Provide Versatility in Use.

All Air Tools
 Equipped with Plugs For Instant Use.



MILTON MANUFACTURING CO., INC.

1900 W. HUBBARD ST. CHICAGO, ILLINOIS 60622

MILTON®

MILTON® REUSABLE HOSE FITTINGS

Quality Re-Usable fittings that are designed for use with $\frac{5}{8}$ " O.D. and $\frac{9}{16}$ " O.D. x $\frac{1}{4}$ " I.D. Hose. NOTE: (They can, in most cases, be used successfully with $\frac{5}{16}$ " I.D. Hose).

A Must wherever air hose is used! In Service Stations Garages, Factories, Airports, etc. . . . These easy to assemble, deep threaded fittings assure Sure-Grip No-Slip Connections.

Sturdy Brass Construction for longer service, Greater Economy through Continued Re-use!

OUR NO.

DESCRIPTION


NO. 615 HOSE END, $\frac{1}{4}$ " MALE P.T. (For $\frac{9}{16}$ " O.D. x $\frac{1}{4}$ " I.D. Single Braid Hose)

NO. 616 HOSE MENDER (For $\frac{9}{16}$ " O.D. x $\frac{1}{4}$ " I.D. Single Braid Hose)

NO. 617 HOSE END, $\frac{1}{4}$ " MALE P.T. (For $\frac{5}{8}$ " O.D. x $\frac{1}{4}$ " I.D. Curb Air Hose)

NO. 618 HOSE MENDER (For $\frac{5}{8}$ " O.D. x $\frac{1}{4}$ " I.D. Curb Air Hose)

P. S. No. 616, and No. 618 Hose Members are ideal for Joining Varied Pieces of Hose into Longer Lengths.

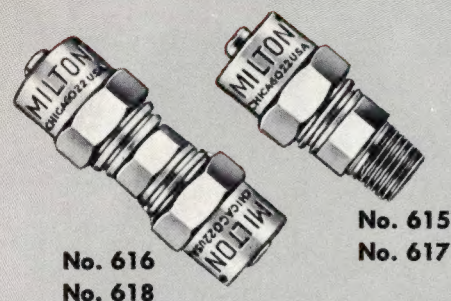

MILTON® AIR HOSE REPAIR KIT (for $\frac{1}{4}$ " I. D. air hose)

**GUARANTEED
AIR-TITE
LEAK-TITE
MADE-RITE**

A necessity wherever air hoses are used . . . such as SERVICE STATIONS, GARAGES, AIRPORTS, FACTORIES, ETC. Boxed complete with all parts to make a permanent repair "ON THE SPOT."


KIT NO.

CONTENTS

620

- *1— 699 Female Air Chuck ($\frac{1}{4}$ " I.P.T.)
- 1— 663 Male Hose End ($\frac{1}{4}$ " I.P.T. x $\frac{1}{4}$ " I.D. Hose)
- 1— 676 Hose Mender ($\frac{1}{4}$ " I.D. Hose Both Ends)
- 3— 664 Hose Clamps ($\frac{5}{8}$ " O.D. Hose)

*NOTE! Sealing type chuck . . . Not to be used with Milton Inflator Gage.

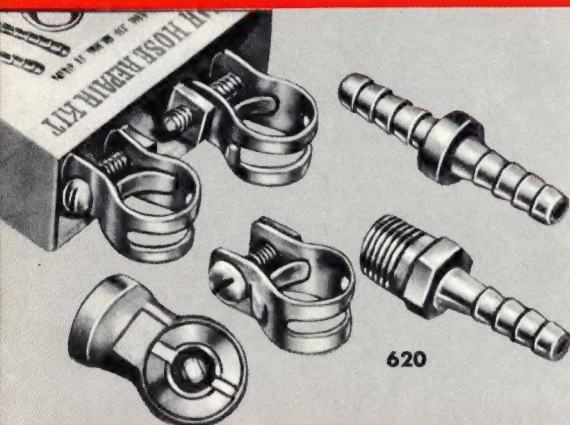

MILTON® AIR LINE FITTINGS

PRECISION CONSTRUCTION—Designed and manufactured to exacting standards.

OUR NO.

DESCRIPTION

*699

Female Air Chuck $\frac{1}{4}$ " I.P.T.

*695

Male Air Chuck $\frac{1}{4}$ " I.D. Hose

663

Male Hose End $\frac{1}{4}$ " I.P.T. x $\frac{1}{4}$ " I.D. Hose

676

Mender ($\frac{1}{4}$ " I.D. Hose Both Ends)

664

Hose Clamp ($\frac{5}{8}$ " O.D. Hose)


666

Chuck Nut

500-7

Neoprene Washer (Standard Size)

*NOTE! Sealing type chuck . . . Not to be used with Milton Inflator Gage.

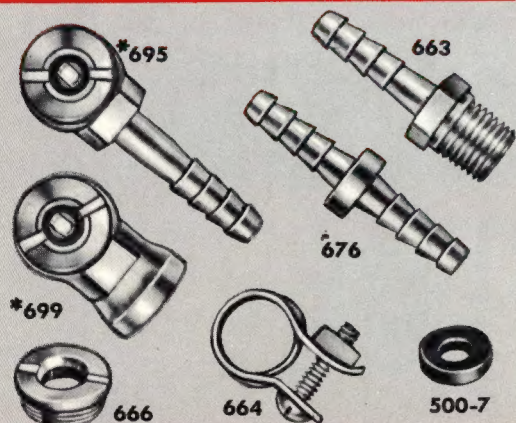

MILTON® DUAL-HEAD AIR CHUCK $\frac{1}{4}$ " N. P. T.


For use only on Direct Air Lines. IMPORTANT: Not for use on Automatic Tire Inflator Gages. Individually packaged in heavy manila envelopes (10 units to box).

OUR NO.

DESCRIPTION

690

Dual Head Chuck (Direct Airline only)

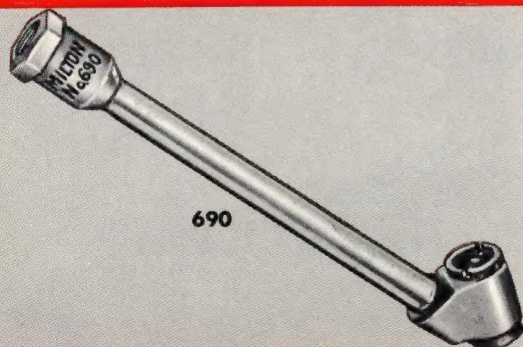

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622

MILTON® PORTABLE AIR TANK

Slimline Construction

SAFE • RUGGED *Certified Airtight*

A must for service stations, parking lots, garages, factories, car owners; truckers, home owners, farmers, boat owners, mechanics, repair servicemen, etc.

PROVIDES EMERGENCY AIR
PREVENTS LOSS OF VALUABLE TIME

INFLATES TIRES • AIR MATTRESSES
• BEACH EQUIPMENT, ETC.

BLOWS OUT

CLEANS OUT

DRYS OUT

FUEL LINES . . . IGNITION SYSTEMS . . . CAR INTERIORS
. . . TYPEWRITERS . . . VENDING MACHINES . . . WASHING
MACHINES . . . CLOTHES DRYERS . . . ETC.

READY FOR INSTANT USE "ON-THE-SPOT"
HANDY BLO-GUN NOZZLE... ALWAYS WITHIN REACH
FINGER TIP CONTROL




EASY TO CARRY
NO BUMPS OR
BRUISES ON LEGS
REQUIRES
MINIMUM
STORAGE SPACE

MILTON®

MILTON® No. 685

Portable Air Tank.
Shipped as illustrated
(Completely assembled).

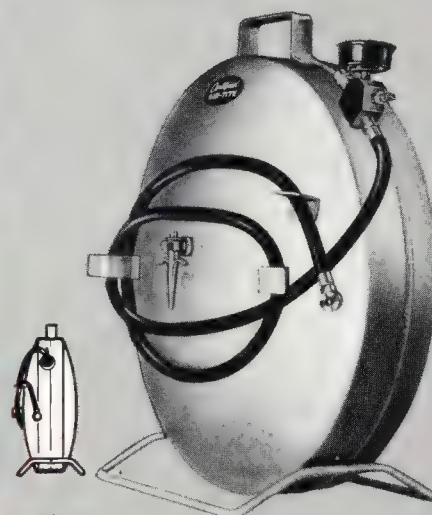

Top quality gage
200 p.s.i.g.

Large rugged handle
easy to carry even with
heavy mittens.

6' air hose
assembly complete
with genuine
Milton Air Chuck
Strong brackets for
hose . . . neat and
compact for
carrying or storage.

Heavy duty
automatic
submerged-
arc welded
construction . . .
approx., 8" wide
x 18" diameter,
14 gauge steel.

**WEIGHS ONLY
22 LBS.**

Safety valve
pre-set to pop-off at
160 p.s.i.g.

Exclusive design air
manifold . . . easy
to fill tank valve with
slotted valve cap to
use as handy tool to
remove and insert
valve core.

**PRESS NOZZLE
INTO OPENING OF AIR CHUCK**

Durable attractive
finish gold
hammerloid,
baked on over
primer to resist
rust and
corrosion . . .
provides longer life.





Stand is engineered
to slide and help
prevent tipping.
Complete unit pivots
on bottom of tank.

OUR NO.

DESCRIPTION

- | | |
|--------------|--|
| 685 | Portable Air Tank. (7 Gallon Capacity) |
| 112 | Air Chuck Nozzle, a handy blow-gun. Ready for instant use . . . simply press NOZZLE into opening of Air Chuck. |
| 684 | Tank Valve, 1/8" N.P.T. male, complete with valve core and brass slotted valve cap. |
| 685-4 | Safety Valve, pre-set to "pop-off" at 160 P.S.I.G. (1/4" N.P.T. male). |
| 685-5 | Gage 0 to 200 P.S.I.G. 1/8" N.P.T. (male). |
| 685-7 | Manifold, exclusive design, special aluminum extrusion, rustproof and anodized to resist corrosion. |
| 686 | Hose Assembly, 6 foot length, assembled with 1/4" N.P.T. male hose end and genuine Milton® tire chuck. |

REPLACEMENT PARTS



MILTON MANUFACTURING CO., INC.

1900 W. HUBBARD ST. • CHICAGO, ILLINOIS 60622

MILTON[®]

Get Quality . . . Demand MILTON[®]



107

MILTON[®] Streamlined BLO-GUN

4" extension available—easily installed for use in those hidden corners.
Replaceable washer.

Indispensable for cleaning fuel and oil lines, air cleaners and car interiors—drying out wet ignition systems and spark plugs—blowing out dust, dirt, filings, metal chips and hundreds of other uses. A necessity for Service Stations, Garages, Airports, Factories, or wherever an air hose is used. Individually boxed.

OUR NO.	DESCRIPTION
107	MILTON Blo-Gun (1/4" N.P.T.)
108	4" Extension (Not Illustrated)
109	Neoprene Washer (Not Illustrated).




150

MILTON[®] LEVER-TYPE BLO-GUN

POSITIVE LEVER CONTROL EASY TO USE—NO FATIGUE

A PRECISION INSTRUMENT WITH HUNDREDS OF AUTOMOTIVE AND INDUSTRIAL USES—RUGGED CONSTRUCTION FOR EXTRA SERVICE—used in small or large Industrial Plants, Airports, Service Stations or Garages . . . Truly a piece of equipment . . . Precision made.

OUR NO.	DESCRIPTION
150	MILTON Lever-Type Blo-Gun, 1/4" N.P.T.

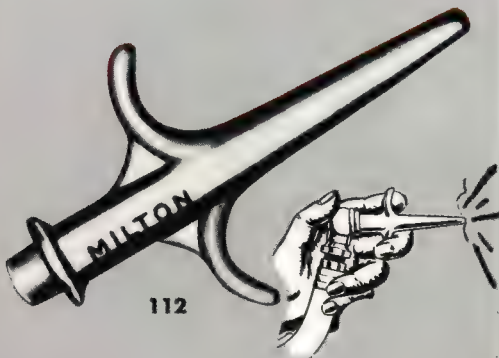

112

MILTON[®] AIR CHUCK NOZZLE

A HANDY BLOW-GUN

Ready for instant use—simply press NOZZLE into opening of Air Chuck.

OUR NO.	DESCRIPTION
112	Air Chuck Nozzle, Bulk
112C	Display Card of 10
112S	Individually Carded

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622

MILTON® HANDEE BEND WATER NOZZLES

BEND
WATER'S ON
RELEASE
IT'S OFF

... NO WASTED WATER ... Many uses around the Service Station, Garage, Home, Farm, Cannery, Packing House, Factory, etc.

A Use For Every Model!
A Model For Every Use!

RUGGED

HEAVY DUTY ... SOLID BRASS MACHINED BODY INSURES LONG TROUBLE FREE SERVICE.

OUR NO.	DESCRIPTION
300	"Regular" Handee-Bend Water Nozzle (Approx. 4" Long). Female Garden Hose Thread.
350	"Regular" Handee-Bend Water Nozzle (Approx. 4" Long). 1/4" N.P.T.
360	"Deluxe" Handee-Bend Full-Flo Water Nozzle (Approx. 6 3/4" Long). Female Garden Hose Thread.
361	"Deluxe" Handee-Bend Jet-Stream Water Nozzle (Approx. 6 3/4" Long). Female Garden Hose Thread.
375	"Jumbo" Handee-Bend Full-Flo Water Nozzle (Approx. 8 1/4" Long). Female Garden Hose Thread.
376	"Jumbo" Handee-Bend Jet-Stream Water Nozzle (Approx. 8 1/4" Long). Female Garden Hose Thread.
378	"Adapter" Male Garden Hose Thread x Female 1/4" N.P.T. (Will Convert Nos. 300, 360, 361, 375 and 376 to Female 1/4" (N.P.T.)

MILTON®




MILTON® FILLER FAUCETS

- Long Spout
- Positive Lever Control
- Smooth Flow
- Easier to Operate

HEAVY DUTY CONSTRUCTION ... Ruggedly Built for Longer Life (Stainless Steel Springs).

A necessity for Service Stations, Garages, Factories, Farms, etc., wherever use of water must be controlled at the point of discharge. Individually boxed.

OUR NO.	DESCRIPTION
200	Filler-Faucet, rigid brass spout, No Drip Screen, Female Garden Hose Thread.
205	Filler Faucet, rigid brass spout, No Drip Screen, 1/4" N.P.T. for use on small diameter hose used on wells and reels.
208	Filler Faucet, flexible rubber spout, Female Garden Hose Thread.
209	Filler Faucet, flexible rubber spout, 1/4" N.P.T. for use on small diameter hose used on wells and reels.
210	Replacement Rubber Nozzle (Not Illustrated).

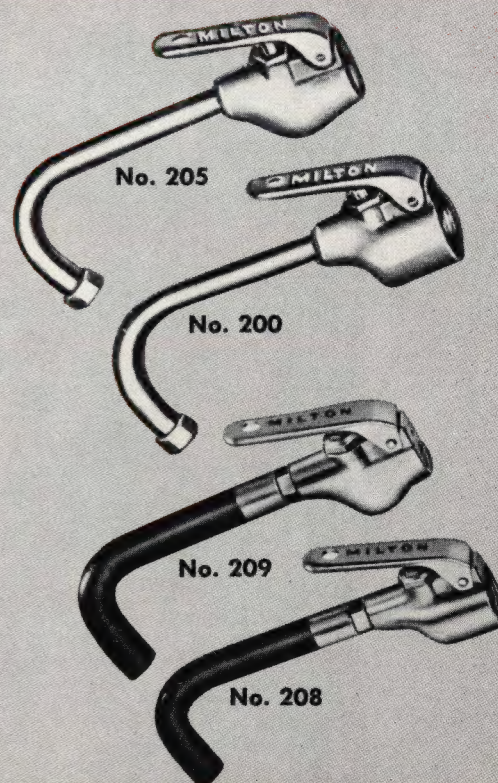

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622

MILTON®

MILTON® TUBELESS TIRE VALVES

with
the **SAFETY PLUS**
of the MILTON
No. 405 "All-
Pressure" VALVE
CORE

- ★ **FINEST QUALITY**
- ★ **GREATER SAFETY**
- ★ **TOP PERFORMANCE**

THE "Sure-Seal" THAT MEANS "Sure-Sales!"

Get the Guaranteed Airtight TUBELESS TIRE VALVE . . .
"Snap-in" type construction for easy installation . . .
Made of the finest materials to assure Dependable
Service . . . PLUS . . . the Safety Sealing features of the
No. 405 "All-Pressure" VALVE CORE . . .

NOTE: . . . Use MILTON No. 449 Valve Insertion Tool for easy insertion (and removal) of all Snap-in Valves.



OUR NO.	TR NO.	RIM HOLE DIA.	EFFECTIVE LENGTH	VALVE CAP	PACKAGING*
M413 M413BK	TR 413 TR 413	.453" .453"	1 1/4" 1 1/4"	METAL PLASTIC	10 50
M414 M414BK	TR 414 TR 414	.453" .453"	1 1/2" 1 1/2"	METAL PLASTIC	10 50
M415 M415BK	TR 415 TR 415	5/8" 5/8"	1 1/4" 1 1/4"	METAL PLASTIC	10 50
M418 M418BK	TR 418 TR 418	.453" .453"	2" 2"	METAL PLASTIC	10 50
M420 M420BK	TR 420 TR 420	5/8" 5/8"	1 3/4" 1 3/4"	METAL PLASTIC	10 50
M423 M423BK	TR 423 TR 423	.453" .453"	2 1/2" 2 1/2"	METAL PLASTIC	10 50
M425 M425BK	TR 425 TR 425	5/8" 5/8"	2" 2"	METAL PLASTIC	10 50

All models of tubeless tire valves with plastic valve caps now also available in bulk packages of 500 each.

MILTON® VALVE EXTENSIONS

Enables you to "REACH WITH EASE"
"HARD TO GET AT" VALVES . . .

MODERN "VALVE PIN" TYPE DESIGN ALLOWS COMPLETE SERVICING!
CHECK PRESSURE • INFLATE • DEFLATE

. . . just as you would on the tire valve itself
. . . No need to remove extension . . .

Rugged yet Decorative; Precision Engineered Construction . . . Threaded end to take Valve Cap . . . won't vibrate loose . . . won't depress core until chuck is applied . . . made of heavy Brass (plated).



OUR NO.	DESCRIPTION
441	Valve Extension, 3/4" Effective Length. Packed Bulk, 25 to a Box, ten boxes to a re-shipper Carton.
442	Valve Extension, 1 1/4" Effective Length. Packed Bulk, 25 to a Box, ten boxes to a re-shipper Carton.

"All-Pressure" * VALVE CORE


* **FOR ALL AIR PRESSURE NEEDS
FROM 1 LB. TO 2500 LBS.**

★ **Positive Seal** ★ **Fast Inflation**

NOW . . . a single valve core designed to satisfy ALL customer requirements . . . Precision engineered, designed and manufactured to assure you of **RUGGED DEPENDABILITY, SERVICE and QUALITY BEYOND COMPARE PLUS** that Something **EXTRA** you expect from all **MILTON® PRODUCTS** . . .

★ **EXCLUSIVE DESIGN** ★
★ **SAFETY FEATURES** ★

Features never before available are yours . . . the results of years of research, test, and thousands of miles of "over the road" actual use by automobiles and truck fleets.




Exclusive **ONE PIECE PIN** with tapered molded, rubber seat plus **SPECIAL TAPERED BARREL CONSTRUCTION** Guarantees Positive Seal . . . Eliminates "SET" failures experienced with "Knife Edge" Type Seals.

★ **Guaranteed Airtight** ★

Our No.	Description
405	"All-Pressure" VALVE CORE . . . Packed 5 to a "Perfo-Pak" Package, 20 Packages to a Box of 100, five boxes of 100 to a re-shipper Carton.
405BK	"All-Pressure" VALVE CORE . . . Packed Bulk, 100 to a Box, five boxes of 100 to a re-shipper Carton.

MILTON®

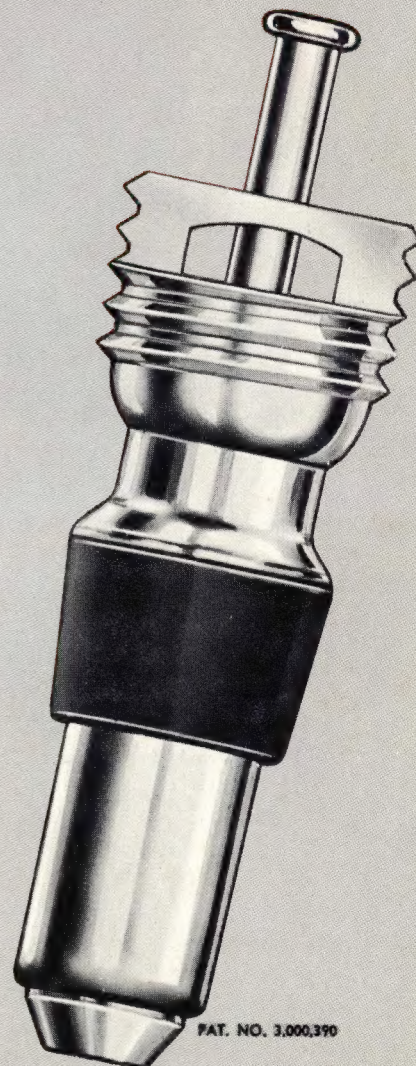

MILTON® VALVE CAPS

**A Model For
Every Use!**

★ **DEEP THREADED**
★ **POSITIVE SEAL**
★ **RUGGED CONSTRUCTION**

YOUR CHOICE . . . **DOME TYPE** or **SCREW DRIVER TYPE**, of heavy (Nickel-Plated) Brass . . . or economical black Plastic Dome Type Cap . . . each model designed to Seal tight and stay sealed even after prolonged use.

OUR NO.	DESCRIPTION
436	Valve Cap, Dome Type, Brass; Nickel-Plated. Packed 5 to a "Perfo-Pak" Package, 20 Packages to a Box, ten boxes to a re-shipper Carton.
436BK	Valve Cap, Dome Type, Brass; Nickel-Plated. Packed Bulk, 100 to a Box, ten boxes to a re-shipper Carton.
437	Valve Cap, Screw Driver Type, Brass; Nickel-Plated. Packed 5 to a "Perfo-Pak" Package, 20 Packages to a Box, ten boxes to a re-shipper Carton.
437BK	Valve Cap, Screw Driver Type, Brass; Nickel-Plated. Packed Bulk, 100 to a Box, ten boxes to a re-shipper Carton.
439	Valve Cap, Dome Type, Plastic (Black) Cap. Packed Bulk, 100 to a Box, ten boxes to a re-shipper Carton.



MILTON MANUFACTURING CO., INC.


1900 W. HUBBARD ST. • CHICAGO, ILLINOIS 60622

MILTON®

MILTON® VALVE INSERTION TOOL FOR THE INSTALLATION AND REMOVAL OF "SNAP-IN" TYPE TUBELESS TIRE VALVES

This RUGGEDLY CONSTRUCTED ALL STEEL TOOL is designed to provide the Sure-Grip leverage necessary for positive Seating or Removal of "Snap-in" type Valves . . . Deep threaded head assures ease of Valve Stem attachment . . . Plated to resist corrosion.


OUR NO.	DESCRIPTION
449	Valve Insertion (and Removal) Tool.

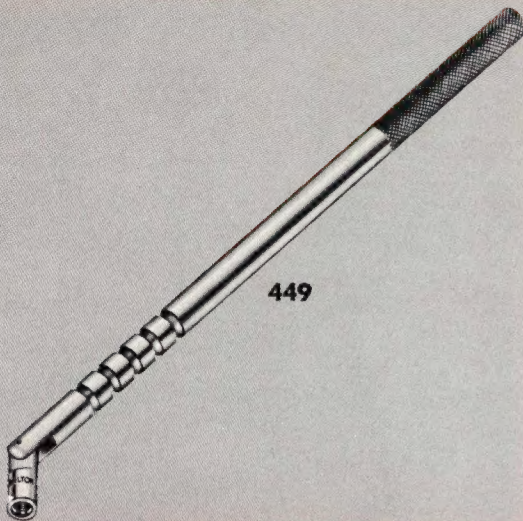

MILTON® VALVE REPAIR TOOL THE 4 IN 1 TOOL FOR VALVE STEM AND CORE!

LOOK . . . Rethreads inside and outside of Valve Stem . . . Insert, tighten or remove Valve Core (with guide which Slips over Stem) . . . "EASY-OUT" to remove core if shoulders are broken off . . . All Steel, plated to resist corrosion.


OUR NO.	DESCRIPTION
445	Valve Repair Tool (4 in 1).

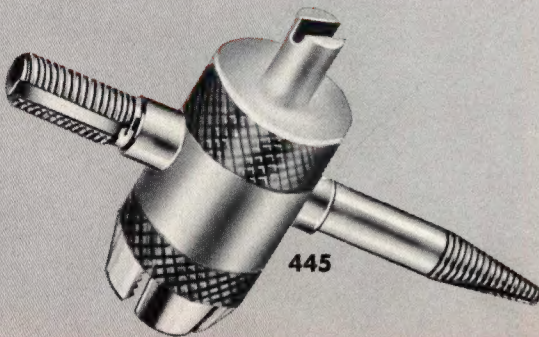

MILTON® TUBE DEFLATOR & CORE REMOVER

THE 2 IN 1 TOOL . . . Deflator on one end; threaded I.D. enables attachment to Valve Stem . . . Valve Core wrench on the other end, to insert and tighten or remove core.


OUR NO.	DESCRIPTION
446	Tube Deflator & Core Remover (2 in 1).



MILTON® VALVE FISHING TOOL PROVIDES FEATURES OF VALVE INSERTION TOOL AND TUBE DEFLATOR & CORE REMOVER!

Made with strong, flexible steel cable . . . designed to align and/or seat Valve Stem through rim hole . . . handle construction simulates same features offered in MILTON Tube Deflator & Core Remover.

OUR NO.	DESCRIPTION
447	Valve Fishing Tool.

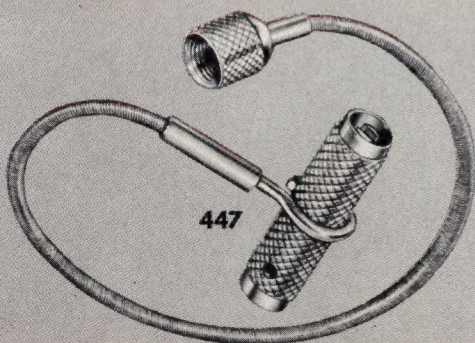

MILTON MANUFACTURING CO., Inc.

1900 W. HUBBARD ST.
CHICAGO, ILLINOIS 60622